



## Specifications

### Lighting specifications

Light source	48-80 x High power LED
Gross Luminous Flux	Max. 24.500 lm
Net Luminous Flux	Max. 22.050 lm
Color Temperature (CCT)	3000 / 4000 kelvin / Custom CCT upon request
Color Rendering Index (CRI)	Ra ≥ 70 / Ra ≥ 80
Optical Technique	Direct Lens System

### Electrical specifications

Appliance classes	Class I / II / III
System power	Max. 150 W
Power factor	cos phi > 0,95 @ full load (100%)
Operating Voltage	220-240 Vac, 50/60 Hz
Driver	Philips Xi BP / Xi LP / Xi FP / Xi SR / Osram / Inventronics
Dimming options	1-10V / DALI / DALI 2.0 / CLO / Line Switch / other upon request

### Usage and Installation

Operating Temp.	-20°C - +50°C
Lifespan	L90 B10 100.000 hours @ Ta=25°C
Mounting size	48 mm / 60 mm / 76 mm
Tilting angles	Vertical: 0 - +15 degrees, Horizontal: -15 - +15 degrees

### Physical details

Material	Aluminum
Material Cover	Flat clear glass / Anti-glare glass / Curved clear glass
Housing Colour	Akzo 900 Gris Sablé / Other RAL optional
Weight	8 kg

### Protection

Impact Resistance	IK09
Ingress Protection	IP66
Coating Class	C3 / C4 on request

### Quality and Certification

CE / ENEC / ENEC+ / ZD4i



### Country of origin

Netherlands

### Revision date

22/02/2022

## Dimensions

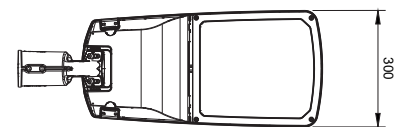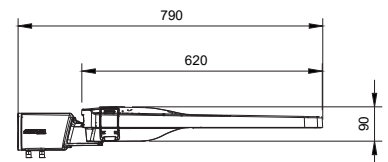

## Smart Systems

